


OCDT SERIES

OPEN CHANNEL DIFFUSERS



The OCDT series diffuser is designed to allow for the dispersion of chemical across the width of an open channel. The diffuser's end studs allow for easy installation to the side walls of the channel by using the BRKT mounting flanges. The varying application conditions that the OCDT is used in leads these to be a custom fabricated component. Once the general ordering parameters below are selected, SAF-T-FLO can assist with preparation of project drawings specific to your desired model.

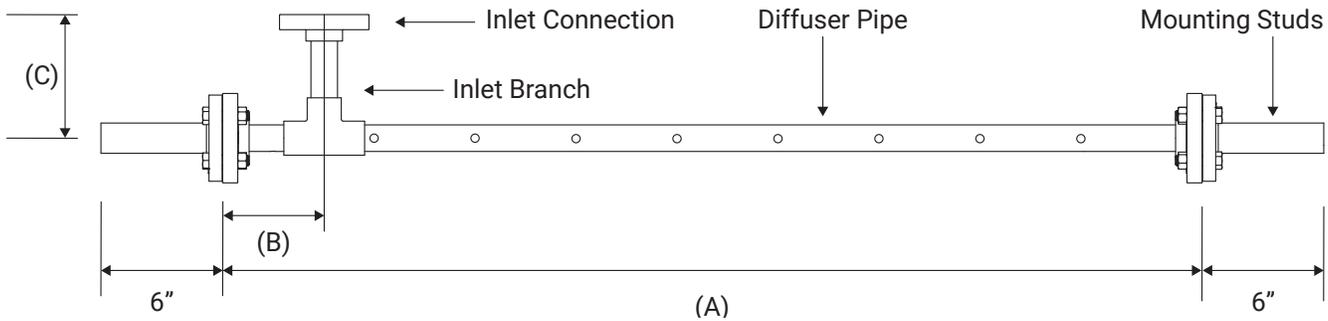

ORDERING INFORMATION

SERIES	DIFFUSER PIPE SIZE	MATERIAL	(A) DIFFUSER WIDTH	INLET BRANCH SIZE ²	(B) INLET BRANCH INSET	(C) INLET BRANCH HEIGHT
OCDT						
	075 = 3/4" 100 = 1" 150 = 1-1/2" 200 = 2" 250 = 2-1/2" 300 = 3"	P = PVC C = CPVC H = Alloy C276 S = 316SS A = Alloy 20 T = TITANIUM Gr.2 ¹	SPECIFY WIDTH IN INCHES	075 = 3/4" 100 = 1" 150 = 1-1/2" 200 = 2" 250 = 2-1/2" 300 = 3"	SPECIFY LENGTH IN INCHES	SPECIFY LENGTH IN INCHES

BRKT

OPTIONAL MOUNTING BRACKETS (AVAILABLE SEPARATELY)



ORDERING CODE	MATERIAL
BRKT-P	PVC
BRKT-C	CPVC
BRKT-S	316SS
BRKT-H	Alloy C276

TECH NOTES

1. Titanium availability is subject to change. Please inquire prior to selecting.
2. Inlet branch size cannot be larger than diffuser pipe size..
3. Holes shown only for illustration purposes. Diffuser hole number, sizing, spacing, and layout to be provided by customer. SAF-T-FLO does not provide recommendations on diffuser holes.
4. Additional mounting hardware (supports, wall mounting bolts, etc.) are not included.