

1 Diagrams for Setting the Capacity

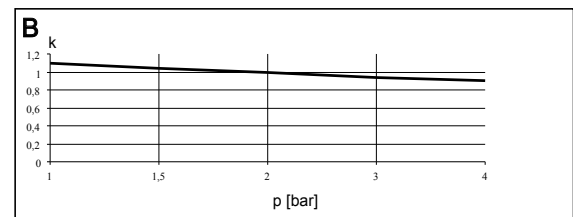
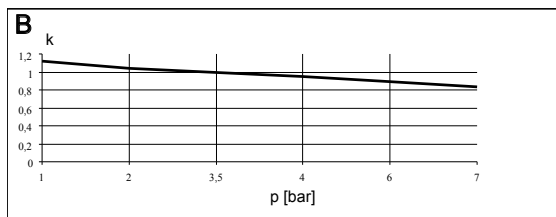
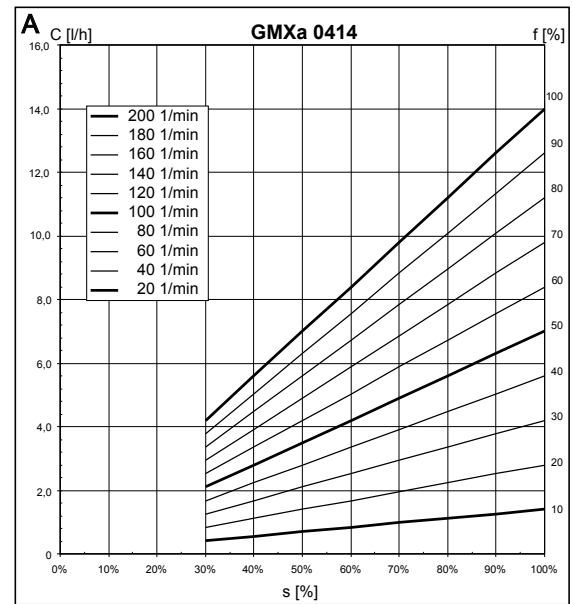
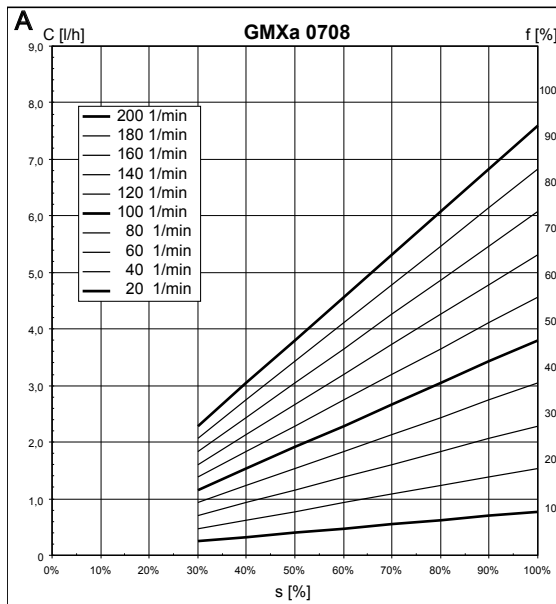
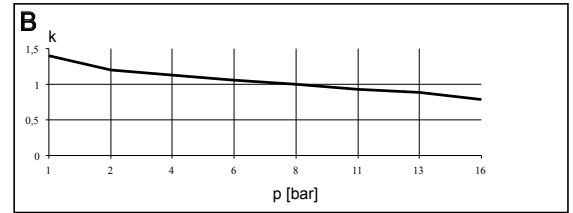
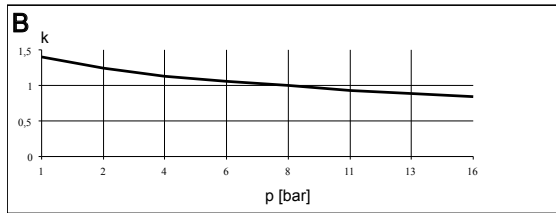
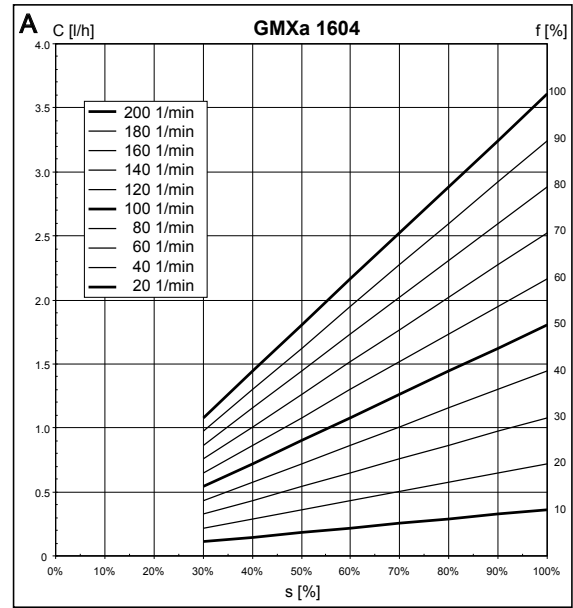
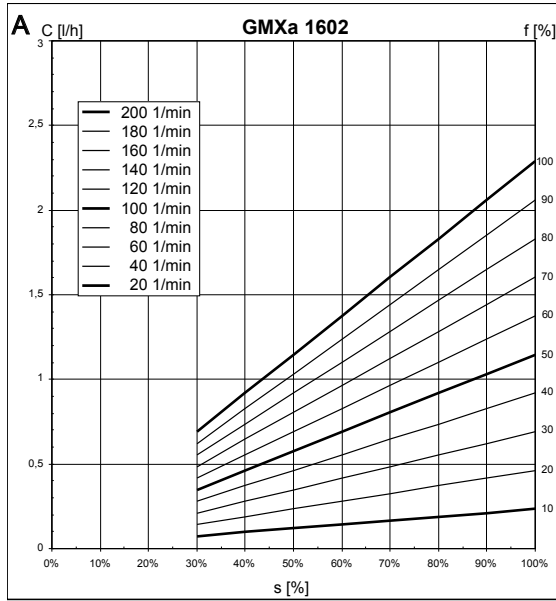


Fig. 1: A) Capacity C at maximum back pressure depending on the stroke length s for different stroke rates f . - B) Corresponding correction factors k dependent on back pressure p - at 70 % stroke length, "Automatic"- "Off" and "Compensation"- "Off".

Diagrams for Setting the Capacity

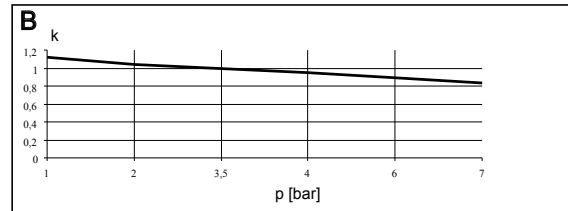
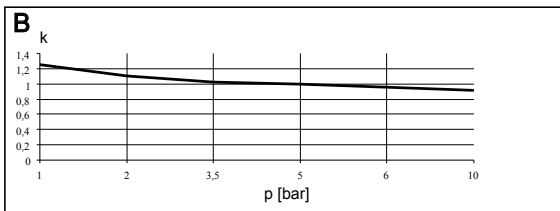
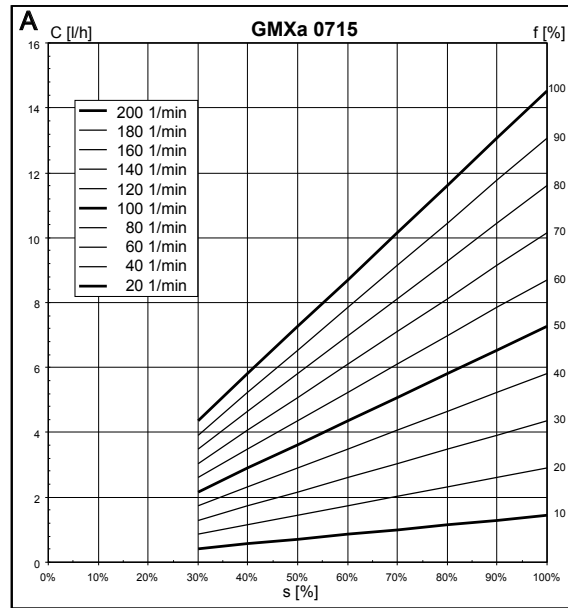
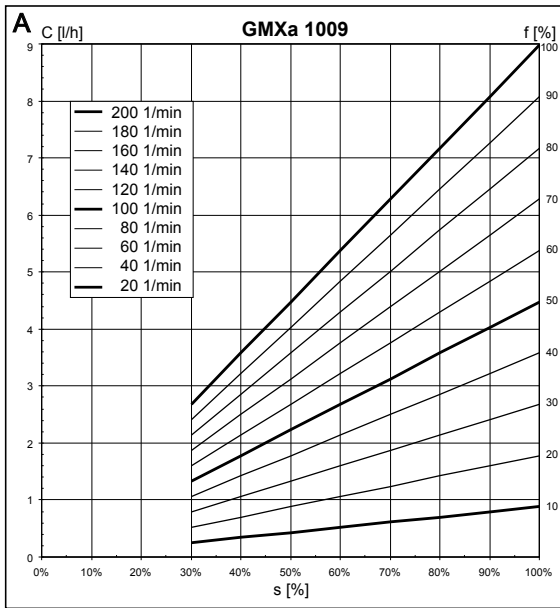
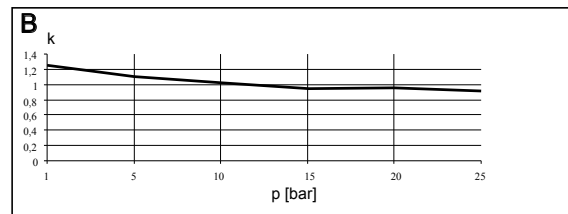
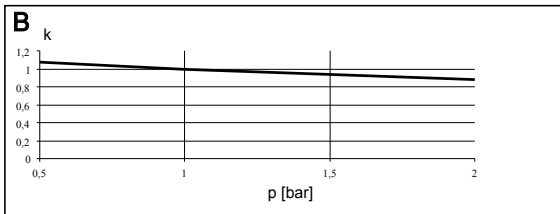
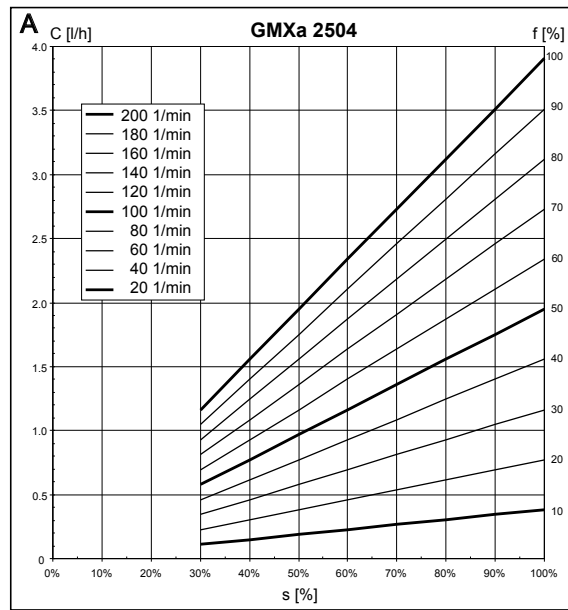
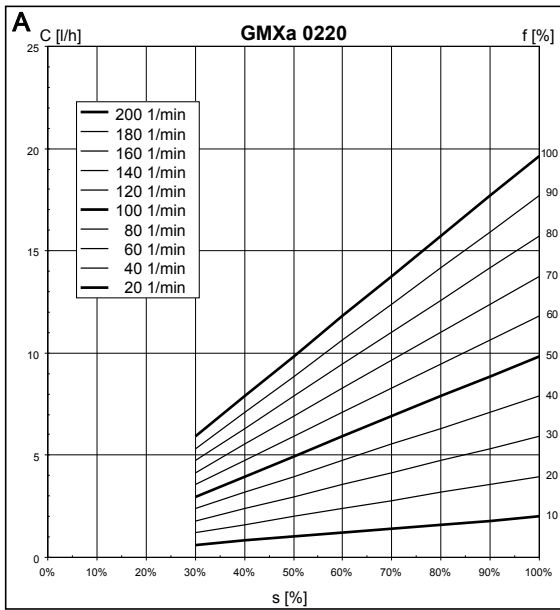


Fig. 2: A) Capacity C at maximum back pressure depending on the stroke length s for different stroke rates f . - B) Corresponding correction factors k dependent on back pressure p - at 70 % stroke length, "Automatic"- "Off" and "Compensation"- "Off".

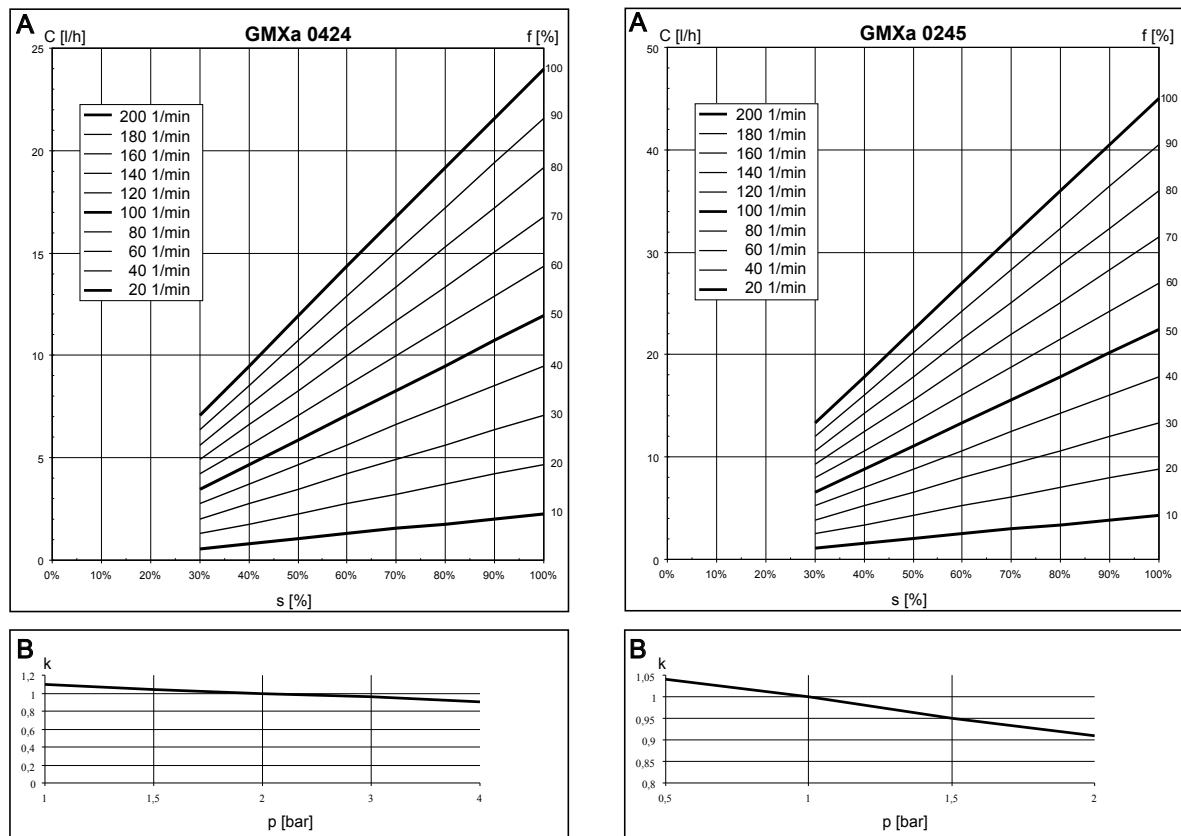


Fig. 3: A) Capacity C at maximum back pressure depending on the stroke length s for different stroke rates f .
 - B) Corresponding correction factors k dependent on back pressure p - at 70 % strockelength, "Automatic"- "Off" and "Compensation"- "Off".